


Relay for Inverting 12-Volt Input



- 85 & 30- Connect to chassis ground
- 86- Connect to 12-volt trigger
- 87- Connect to MASTERCELL input

- Infinitywire MASTERCELL inputs are designed for ground switching
- Applying 12-volts to an Input will damage the MASTERCELL and void the warranty
- Use an inVERT Mini or a relay to convert a 12-volt trigger to a ground trigger for the MASTERCELL
- Examples include Fuel Pump Triggers from ECUs, Cooling Fan Triggers from ECUs and switches with built-in lighting

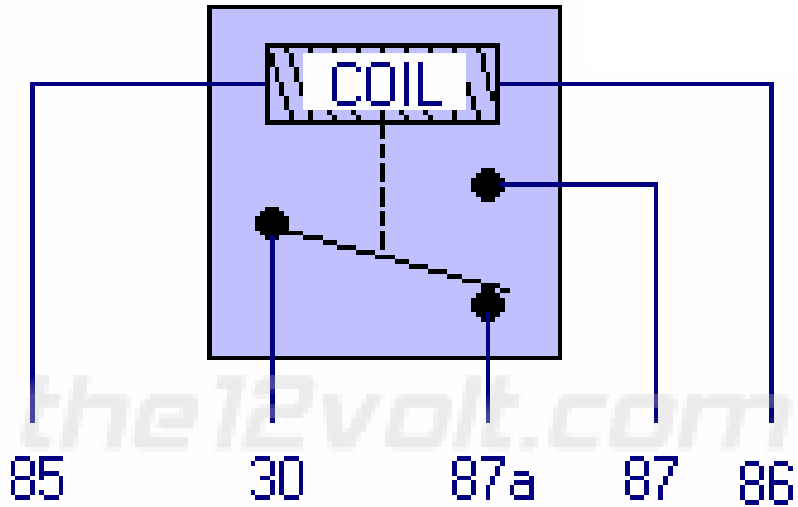